
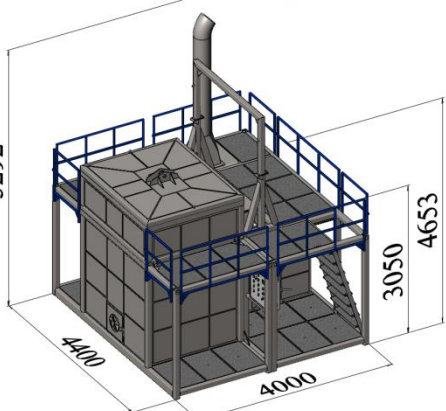




FROM JANUARY 01, 2022

PRICE LIST DESTRUCTORS OF THE "DS" SERIES

Name of the Destructor	DS-4000	DS-5000
Reactor capacity	4,0 m ³	5,0 m ³
Performance	up to 8000 kg / day	up to 10000 kg / day
Overall dimensions of the assembly: - length, mm -width, mm -height, mm		
Weight of the module assembly	11100 кг	11500 кг
Voltage of the power supply network	380 V	380 V
Electricity consumption	6 kW/h	6 kW/h
Operating mode	around the clock	around the clock
Ash residue, no more than	6%	6%
Time to enter the operating mode	45 min	45 min
Service personnel	2 people	2 people
Permissible humidity of raw materials *	50 %	50 %
The size of the raw fraction	up to 120 mm	up to 120 mm
Exhaust gas temperature	265 °C	265 °C
Peak temperature of plasma chemical destruction	до 2000 °C	до 2000 °C
Processed raw materials	Carbon-containing waste	
Price without VAT	33 600 000 Р	42 000 000 Р

*With a further increase in humidity, the productivity of the installation decreases .



ИНН: 5752048079
КПП: 575201001



302042, Россия, г.Орёл,
Кромское шоссе, 3



sdm-orel@mail.ru
www.sdm-orel.ru



8(910)300-97-00
8(920)286-97-00