
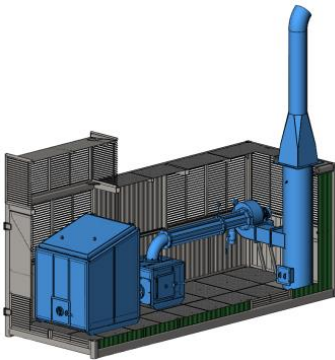


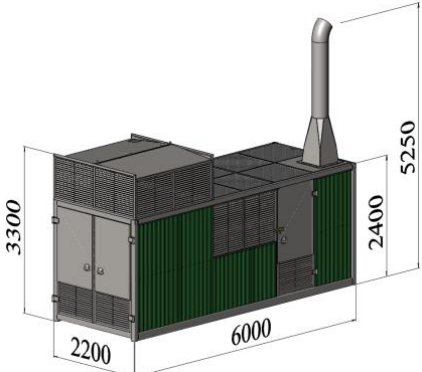

FROM JANUARY 01, 2022

## PRICE LIST DESTRUCTORS OF THE «TDM» SERIES

| Name of the Destructor   | TDM-300   | TDM-500  |
|--|---|--|
| Reactor capacity   | 0,3 m <sup>3</sup>  | 0,5 m <sup>3</sup>   |
| Performance  | up to<br>800 kg\day   | up to<br>1200 kg\day   |
| Overall dimensions of the assembly:<br>- length, mm<br>-width, mm<br>-height, mm |  |  |
| Weight of the module assembly  | 5800 кг   | 6100 кг  |
| Voltage of the power supply network  | 380 V   | 380 V  |
| Electricity consumption  | 650 W / h   | 650 W/h  |
| Operating mode   | around the clock  | around the clock   |
| Ash residue, no more than  | 6%  | 6%   |
| Time to enter the operating mode   | 45 min  | 45 min   |
| Service personnel  | 1 person  | 1 person   |
| Permissible humidity of raw materials *  | 50 %  | 50 %   |
| The size of the raw fraction   | up to 120 mm  | up to 120 mm   |
| Exhaust gas temperature  | 265 °C  | 265 °C   |
| Peak temperature of plasma chemical destruction                                  | up to 2000 °C   | up to 2000 °C  |
| Processed raw materials  | Carbon-containing waste   |  |
| <b>Price without VAT</b>   | <b>12 420 000 Р</b>   | <b>14 940 000 Р</b>  |

\*With a further increase in humidity, the productivity of the installation decreases.



ИНН: 5752048079  
КПП: 575201001



302042, Россия, г.Орёл,  
Кромское шоссе, 3



sdm-orel@mail.ru  
www.sdm-orel.ru



8(910)300-97-00  
8(920)286-97-00