
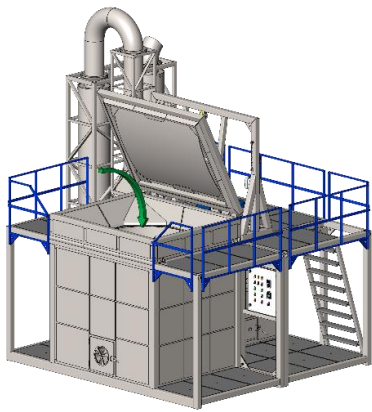


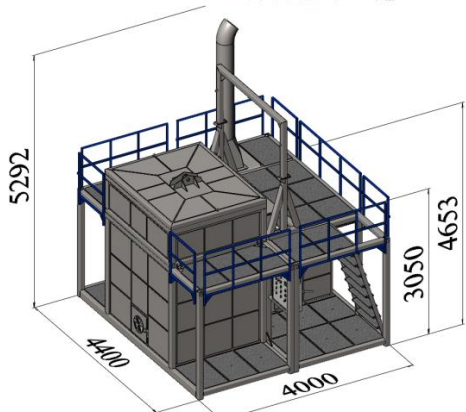

FROM JANUARY 01, 2022

PRICE LIST DESTRUCTORS OF THE «TDS» SERIES

| Name of the Destructor | TDS-4000 | TDS-5000 |
|--|---|--|
| Reactor capacity | 4,0 m ³ | 5,0 m ³ |
| Performance | up to 8000 kg / day | up to 10000 kg / day |
| Overall dimensions of the assembly: - length, mm - width, mm - height, mm |  |  |
| Weight of the module assembly | 11100 кг | 11500 кг |
| Voltage of the power supply network | 380 V | 380 V |
| Electricity consumption | 6 kW/h | 6 kW/h |
| Operating mode | around the clock | around the clock |
| Ash residue, no more than | 6% | 6% |
| Time to enter the operating mode | 45 min | 45 min |
| Service personnel | 2 people | 2 people |
| Permissible humidity of raw materials * | 50 % | 50 % |
| The size of the raw fraction | up to 120 mm | up to 120 mm |
| Exhaust gas temperature | 265 °C | 265 °C |
| Peak temperature of plasma chemical destruction | до 2000 °C | до 2000 °C |
| Processed raw materials | Carbon-containing waste | |
| Price without VAT | 36 600 000 Р | 45 000 000 Р |

*With a further increase in humidity, the productivity of the installation decreases .



ИНН: 5752048079
КПП: 575201001



302042, Россия, г.Орёл,
Кромское шоссе, 3



sdm-orel@mail.ru
www.sdm-orel.ru



8(910)300-97-00
8(920)286-97-00